

ALL-NEW
RENAULT
EXPRESS VAN





transport more

**3.3 m³ of
loading volume**

**1.91 m
loading length**

**record side
opening width
of 716 mm**

**180° opening of
rear doors**



electronic stability control (ESC)

With understeer control and traction control, this helps to maintain vehicle control in "critical" driving conditions (obstacle avoidance, loss of grip when cornering, etc.).

hill start assist

Combined with ESC, hill start assist maintains brake pressure automatically for 2 seconds to give you time to lift your foot from the brake pedal and press the accelerator. The system activates when the slope exceeds 3%.



features & equipment



glacier white body color



black fabric interior upholstery



15" kijaro wheel trim

driving and safety

- driver's front airbag
- electronic stability control (ESC) with hill start assist

comfort

- automatic front headlight illumination
- overhead storage/glovebox with lid
- electric front windows
- 12 V socket in central console



exterior design

- 15" Kijaro medium wheel trims

professional features

- 6 rotating lashing rings on the floor
- solid panelled partition with window
- panelled asymmetrical rear doors
- Right-hand panelled sliding side door

	TCE 100 FAP (Petrol)	Blue dCi 95 (Diesel)
Engines		
Capacity [cm ³]/number of cylinders/valves	1,598/4/16	1,463/4/8
Peak power kW EEC (hp) at rpm	85 (110) at 5,500	70 (94) at 3,750
Max. torque Nm EEC at rpm	156 at 4,000	220 at 1,500
Injection type	multi-point injection	diesel common rail
Fuel and tank volume (L)	petrol - 50	diesel - 50
Emission control standard	Euro 6C	Euro 6
Gearbox type/number of gears	manual/5-speed	
Stop & start and energy recovery on braking	as standard	
Service interval ⁽¹⁾	up to 10,000 km/6 months	
Performance		
Maximum speed (km/h)	170	160
0 - 100 km/h (s)	11.6	12.2
Fuel consumption and CO₂ emissions⁽²⁾		
Certification protocol	WLTP ⁽³⁾	
Mixed consumption (L/100 km) (min/max/max with corner)	7.8/9.9/6.6	5.0/5.5/4.6
CO ₂ emissions (g/km) (min/max/max with corner)	148/168/160	131/144/163
Steering		
Kerb-to-kerb / wall-to-wall turning circle (m)	11.1/11.6	
Braking		
Anti-lock Braking System (ABS) with Emergency Brake Assist (EBA) and electronic stability control (ESC)	as standard	
Ventilated discs at front: diameter x thickness (mm)- Rear drum brakes: diameter (")	ventilated disc 280 x 24 9" drum	
Tyres		
Tyre size	185	
Wheel size	65R15	
Load		
Payload ⁽⁴⁾	up to 750 kg	up to 763 kg

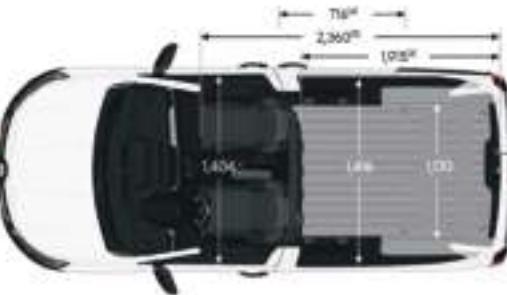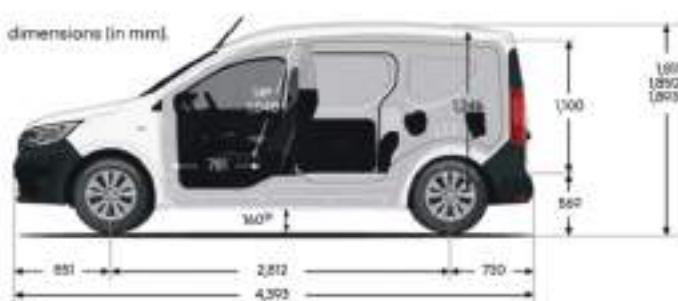

Loading area

Loading volume behind panelled/modular bulkhead (dm ³)	3,300
Loading volume modular bulkhead folded back and passenger seat folded down (dm ³)	3,700
Height of hinged doors (mm)	1,844

(1) depending on driving style. (2) Fuel consumption and CO₂ emissions are certified using a standard, regulatory method, it is identical for all manufacturers and allows vehicles to be compared. (3) WLTP (Worldwide Harmonized Light Vehicle Test Procedure); this new protocol provides results much closer to those found in daily use compared to the NEDC protocol.